
TECHNICAL SHEET

FOAM UNIT OF 13 OFFSET OPEN WRENCHES Réf.: 9802013001

Caracteristics

7 to 19mm. In two-tone foam module 385 x 165 mm. Each tool has a defined place. Missing tools can be spotted in seconds thanks to the red background. High density two-tone foam, does not break, does not retain moisture and is resistant to workshop products. Forged steel keys alloyed with chrome and vanadium. Its controlled heat treatment gives it the hardness to withstand heavy stresses. The openings of the keys are made by broaching, a technology which makes it possible to obtain very precise dimensions with a quality surface finish. The profile of the polygonal heads has been specially designed not to dull the angles of the nuts. The grip is comfortable during high tightening efforts. The keys are protected by chrome plating. The finishing of the surfaces is very neat to obtain tactile comfort and easy cleaning. All keys comply with current NF, DIN and ISO standards. The resistance of the Mob keys is far superior to the specifications of the ISO standards. This performance helps to reduce fatigue for professionals who use their tools intensively. Unblocked key: the protrusion of the threaded rod does not interfere with tightening. Angle of the wrench at 95° to facilitate the release of the hand from the clamping plane. A large reception depth of the screws on the capped key part. Entry chamfer which favors the engagement of the key.

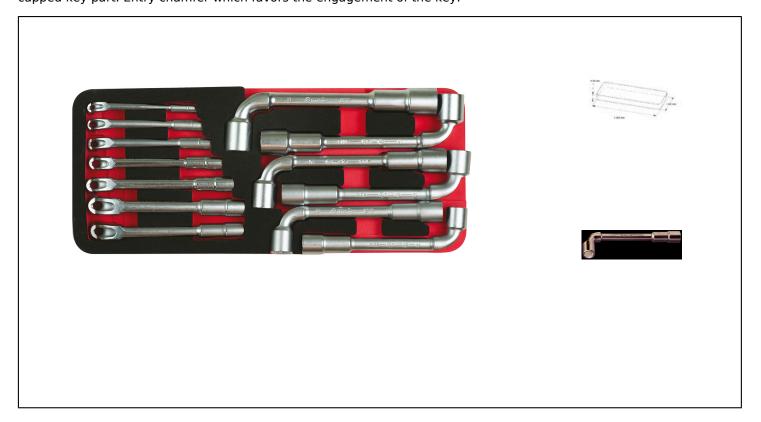

Product data

Content	<u> </u>	G	Artikelnr.		EAN Code	
7-8-9-10-11-12-13-14- mm	2560	IN	9802013001	1	3303809011237	



NOVALIA SAS 2 rue de Bergognon 42500 LE CHAMBON F. FRANCE - www.novalia.pro

PEDDINGHAUS Handwerkzeuge In der Graslake 35 58332 Schwelm DEUTSCHLAND - www.peddinghaus.de

NOVALIA SA Str. Narciselor nr.50 500251 - Braşov ROMÂNIA

NOVALIA ESPAÑA Portuetxe 51, of.204 20018 San Sebastián