
TECHNICAL SHEET

LOCKSMITH'S HAMMER - ASH HANDLE Réf.: 0402020201

Caracteristics

Used initially by mechanics in Germany were looking for an especially strong hammer. High carbon steel head C45E. Forged head with induction-treated working surfaces (54 HRC). Working parts finely polished. Epoxy powder paint by electrostatic process, followed by baking. Chamfer 1 / 20th of the head at 45 °. The connection between the head and steel is made by a hydraulic machine. A stress sensor measures on each product the power of the nozzle, then a pressure sensor controls the installation of the resin. A red ring marks the hammer's wooden handle. Registered design. European ash handle: flexible mechanical behavior, contributing notably to the force of the strikes and the absorption of vibrations. Labeling: PEFC-certified (wood from sustainably managed forests). Extraordinary high performance.

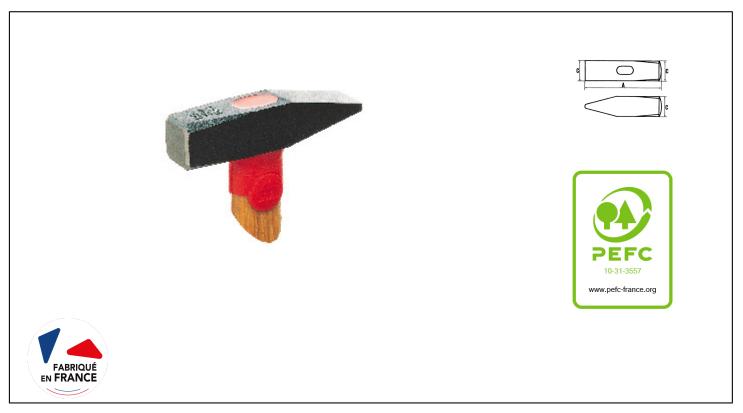

Product data

A mm	C mm	g	G	L mm	Artikelnr.	Replaceme handle	Pc		EAN Code	G
95	19	200	G10	260	0402020201	6801	9	5	3303800060	G10
105	23	300	G10	280	0402030201	6802	11	5	3303800060	G10
118	27	500	G10	300	0402050201	6804	14	5	3303800060	G10
122	29	600	G10	300	0402060201	6805	15	5	3303800060	G10
135	36	1000	G10	330	0402100201	6807	17	1	3303800060	G10
145	42	1500	G10	350	0402150201	6808	17	1	3303800060	G10
155	47	2000	G10	380	0402200201	6809	18	1	3303800060	G10



NOVALIA SAS 2 rue de Bergognon 42500 LE CHAMBON F. FRANCE - www.novalia.pro

PEDDINGHAUS Handwerkzeuge In der Graslake 35 58332 Schwelm DEUTSCHLAND - www.peddinghaus.de NOVALIA SA Str. Narciselor nr.50 500251 - Braşov ROMÂNIA www.mob-ius.ro

NOVALIA ESPAÑA Portuetxe 51, of.204 20018 San Sebastián